





# OD FRIENDS BETTER

So call a friend, make a date and find out how much more enjoyable 2-up scootering can be. Honda's got the power to literally carry you away.

### 6.5PS HIGH TORQUE ENGINE

Honda has done it again. For the first time ever a 5-port cylinder on a scooter engine. Exceptional combustion efficiency gives unbelievable high power, high torque output. The benefits are many. Unbeatable acceleration for quick getaways. Instantaneous response for no-sweat passing. And, when combined with Honda's new-design torque sensor equipped V-matic transmission, hill climbing possibility and 2-up performance previously only dreamed about. All-new transmission system employs a V-belt, wide ratios and forced air cooling to ensure you're always getting the right power for the situation.





### FRESH EXCITING NEW DESIGN


Scootering takes you to many new and exciting places. And the LEAD's at home anywhere. With its slim, fresh new styling, bright colouring and host of convenience features. It matches your mood be it jeans, skirt or suit and turns heads in even the best company.

# 12VOLT HIGH PERFORMANCE ELECTRICS


Scootering efficiency hits a new high with a full complement of high-power electrics. Electric starter, 25 watt headlight, accurate electric fuel gauge, high visibility indicators and oil level indicator with bulb check. For added convenience, key switch is also one-touch fork lock.

## NO-FUSS RIDING FEATURES

Scootering is a simple pleasure.
And Honda's made it even more
so. With such features as pointless
CDI, electric starter, auto-choke
and auto-cock fuel system. Low
maintenance is emphasized everywhere and where necessary is as
simple as possible.

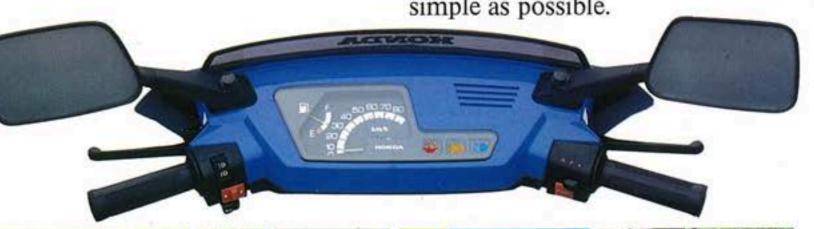







Folding pillion pegs



ComCast



High visibility lighting









COLUMN TO SERVICE STATE OF THE PARTY OF THE	
NH80LEAD Specific	eations
Engine	2-stroke
Bore & Stroke	48×44mm (1.89×1.73in)
Displacement	79.5cm3 (4.85in3)
Compression Ratio	7.0:1
Max. Horsepower	6.5PS/6,500rpm
Max. Torque	0.8kg-m/5,000rpm
Ignition	Capacitor Discharge
Starting System	Electric
Transmission	V-matic
Dimensions (L×W×H)	1,675×665×1,070mm (65.94×26.18×42.13in)
Wheelbase	1,170mm (46.06in)
Seat Height	710mm (27.95in)
Ground Clearance	110mm (4.33in)
Fuel Capacity	5.3 lit (1.4 US, 1.17 IMP gal)
Wheels	ComCast
Tires Front/Rear	3.50-10
	Bottom link/hydraulic damper Unit swingarm/hydraulic damper
Brakes Front Rear	Leading/trailing drum
Dry Weight	73.7 (158.73lb)

Honda machines sold in your area are those most suited to local conditions. Specifications and appearance may differ slightly depending on markets and are subject to change without notice. For details, please consult your nearest Honda dealer.



Your authorized HONDA dealer:

Ride alert. Dress right. Always wear a helmet and eye protection. Enjoy safe motorcycling.

